


# 200 SERIES AXUM


- lumen talk
- High output fixed downlight
- Ideal for high ceilings
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- Wide range of beam angles

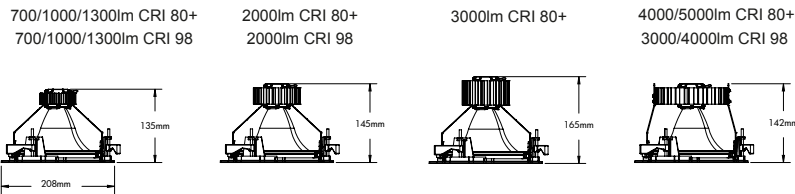


Bezel Size: 208mm Cut Out: Ø198mm  
Ceiling Thickness: 1 - 22mm

## Accessories

To order, use the following suffix

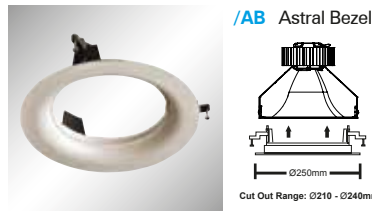



**/AB** Astral Bezel



Factory fitted accessory that extends the bezel to a cutout range of 210mm to 240mm.



- /HL** Honeycomb louvre
- /CG** Clear Glass
- /SL** Softening Lens
- /GR** Decorative Glass Ring

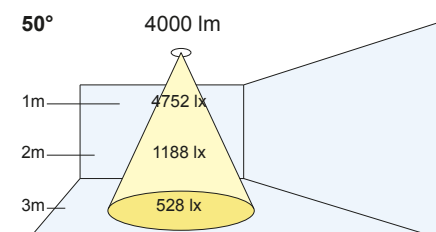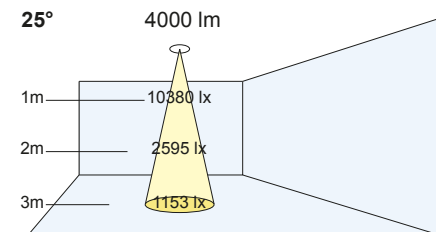

## PRODUCT CODE

Please refer to following page for product exceptions

### Lumen Output:

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm
- (40) 4000 lm
- (50) 5000 lm

### Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

### Colour Rendering:


- (V8) Vibrancy 80
- (V9) Vibrancy 98
- (80) CRI 80+
- (98) CRI 98
- (B9) Beauty

### Beam Angles:

- (N) Narrow: 25°
- (M) Medium: 40°
- (W) Wide: 50°

### Colour:

- (W) White
- (N) Nickel Satin
- (B) Black

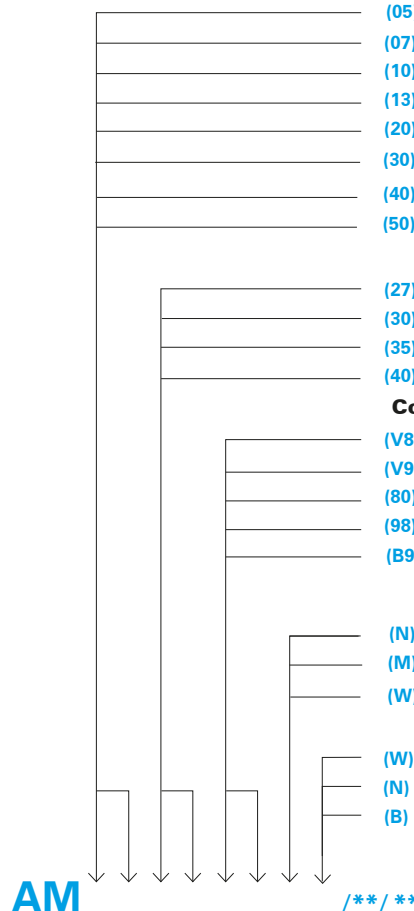

### Options:

- Dimming:**
- /DT** Trailing Edge
- /DL** Leading Edge
- /DD** DALI
- /DA** Analogue (1-10V)
- /LT** Lumentalk
- /M3** 3Hrs Maintained
- /ST** Self Test
- /DE** DALI Emergency

**Availability**

**LED Modules**  
 CRI80 / Vibrancy 80: Standard delivery.  
 CRI98 / Vibrancy 98 / Beauty: Extended delivery times may apply, please contact sales.  
 Future Xicato LED modules: Available via special order. Extended delivery times may apply, please contact sales.

**Colour**  
 White: Standard delivery.  
 Nickel Satin: Extended delivery times may apply, please contact sales.  
 Black: Extended delivery times may apply, please contact sales.

# Product Options

## 200 SERIES AXUM

	CRI 80					CRI 98					VIB 80					VIB 98					BEAUTY				
Beam Angle	70°/1m	100°/1m	130°/1m	200°/1m	300°/1m	70°/1m	100°/1m	130°/1m	200°/1m	300°/1m	70°/1m	100°/1m	130°/1m	200°/1m	300°/1m	70°/1m	100°/1m	130°/1m	200°/1m	300°/1m	70°/1m	100°/1m	130°/1m	200°/1m	300°/1m
<b>Beam Angle</b>																									
Spot: 10°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Narrow: 20°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Medium: 40°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wide: 60°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Colour Temps</b>																									
2200°K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2700°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓
3000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
3500°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Body Colour</b>																									
White	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Satin Nickel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Grey	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Dimming Options</b>																									
Standard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DT Trailing Edge	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/DL Leading Edge	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/DD DALI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DA Analogue (1-10V)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DS DSI	-	-	-	✓	✓	-	✓	-	✓	✓	-	-	✓	-	✓	-	✓	-	✓	✓	-	✓	-	✓	✓
/SD Switch Dim	-	-	-	✓	✓	-	✓	-	✓	✓	-	-	✓	-	✓	-	✓	-	✓	✓	-	✓	-	✓	✓
/DX DMX	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/AP Analogue Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DP DALI Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/UV Universal Voltage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RD Rotary Dimming	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Emergency Options</b>																									
/M3 3Hrs Maintained	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/ST Self Test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DE DALI Emergency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Accessories</b>																									
/P Custom Colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/AB Astral Bezel	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/AW White Front Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BD Barn Doors	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BF Baffle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/CG Clear Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/CG w/c Clear Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/GR Glass Ring	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/HL Honeycomb Louvre	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/HL w/c Honeycomb Louvre (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG Ribbed Spreading Glass	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG w/c Ribbed Spreading Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SL Softening Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/S w/c Softening Lens (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SN Snoot	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/WB White Inner Body With Gyro Rings	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Regional Driver Spec</b>																									
/BIS	Regional driver spec for India, beam angles will vary. Please contact sales team for more information.																								

### Key

- ✓ Option Available
- Only available with spot/narrow optics
- Only available with medium/wide optics
- Option not available