


70 SERIES

IMP

- lumen talk
- Small tiltable recessed downlight
- Die-cast construction
- Black inner housing detail
- Supplied with pre-wired remote non-dimming driver
- Glare control and baffle accessories
- Small cut out for halogen replacement
- IP44 Rated when fitted with glass accessory

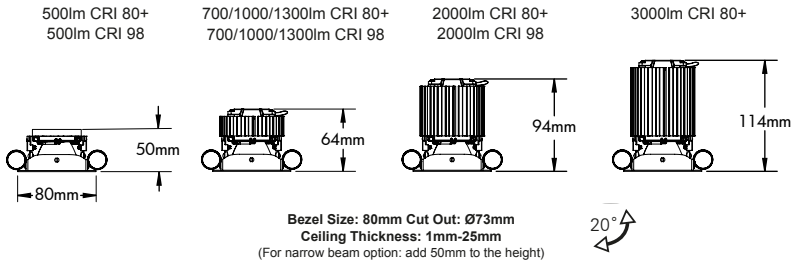

Accessories

To order, use the following suffix

		/HL Honeycomb louve
		/SL Softening Lens
		/CG Clear glass
		/BF Baffle
		/RG Ribbed Spreading Glass

Honecomb louve Baffle

PRODUCT CODE

Please refer to following page for product exceptions

Lumen Output:

_____	(05)	500 lm
_____	(07)	700 lm
_____	(10)	1000 lm
_____	(13)	1300 lm
_____	(20)	2000 lm
_____	(30)	3000 lm

Colour Temps:

_____	(27)	2700K
_____	(30)	3000K
_____	(35)	3500K
_____	(40)	4000K

Colour Rendering:



_____	(V8)	Vibrancy 80
_____	(V9)	Vibrancy 98
_____	(80)	CRI 80+
_____	(98)	CRI 98
_____	(B9)	Beauty

Beam Angles:

_____	(N)	Narrow: 20°
_____	(M)	Medium: 40°
_____	(W)	Wide: 70°

Colour:

_____	(W)	White
_____	(N)	Satin Nickel
_____	(B)	Black

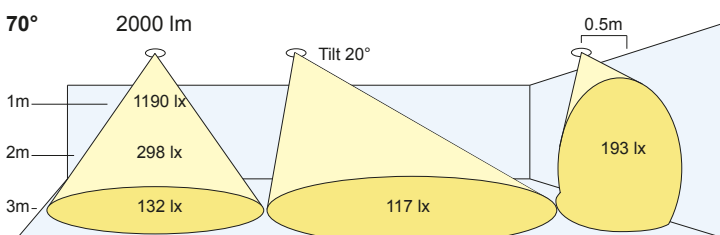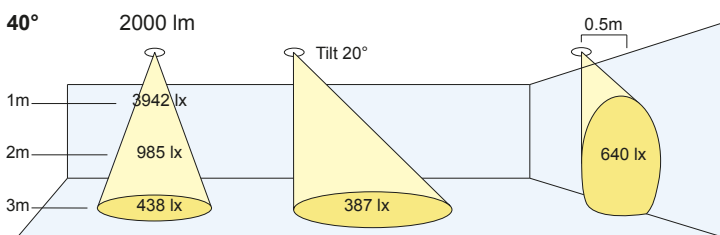

IM _____ / ** / **

Options:

- Dimming:**
- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

For full list of options see page 2.

Availability

LED Modules
 CRI80 / Vibrancy 80: Standard delivery.
 CRI98 / Vibrancy 98 / Beauty: Extended delivery times may apply, please contact sales.
 Future Xicato LED modules: Available via special order. Extended delivery times may apply, please contact sales.

Colour
 White: Standard delivery.
 Nickel Satin: Standard delivery.
 Black: Extended delivery times may apply, please contact sales.

Product Options

70 SERIES IMP

	CRI 80					CRI 98					VIB 80					VIB 98					BEAUTY										
	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	
Beam Angle																															
Spot: 10°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Narrow: 20°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Medium: 40°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Wide: 70°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Colour Temps																															
2200°K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
2700°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	
3000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	
3500°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
4000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Body Colour																															
White	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Satin Nickel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Grey	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Dimming Options																															
Standard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
/DT Trailing Edge	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓
/DL Leading Edge	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	-	✓	✓	✓	✓
/DD DALI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DA Analogue (1-10V)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DS DSI	-	-	●	●	✓	✓	-	-	✓	✓	-	-	-	●	●	✓	-	-	✓	✓	-	-	-	✓	✓	-	-	-	✓	✓	-
/SD Switch Dim	-	-	●	●	✓	✓	-	-	✓	✓	-	-	-	●	●	✓	-	-	✓	✓	-	-	-	✓	✓	-	-	-	✓	✓	-
/DX DMX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/AP Analogue Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DP DALI Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/UV Universal Voltage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RD Rotary Dimming	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Emergency Options																															
/M3 3Hrs Maintained	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/ST Self Test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DE DALI Emergency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Accessories																															
/P Custom Colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/AB Astral Bezel	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/AW White Front Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BD Barn Doors	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BF Baffle	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/CG Clear Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/CG w/c Clear Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/GR Glass Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/HL Honeycomb Louvre	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/HL w/c Honeycomb Louvre (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG Ribbed Spreading Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RG w/c Ribbed Spreading Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SL Softening Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/S w/c Softening Lens (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SN Snoot	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/WB White Inner Body With Gyro Rings	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Regional Driver Spec																															
/BIS	Regional driver spec for India, beam angles will vary. Please contact sales team for more information.																														

Key

- ✓ Option Available
- Only available with spot/narrow optics
- Only available with medium/wide optics
- Option not available