

90 SERIES

MICRO WASHER 90




- lumen talk
- Micro bezel adjustable downlight
- Designed to blend seamlessly into a ceiling
- Die cast construction
- Supplied with deep set baffle and softening lens
- Supplied with pre-wired remote non-dimming driver
- Small cut out ideal for halogen replacement



500lm CRI 80+
500lm CRI 98

700/1000/1300lm CRI 80+
700/1000/1300lm CRI 98

2000lm CRI 80+
2000lm CRI 98




Bezel Size: 80mm Cut Out: Ø73mm
Ceiling Thickness: 1mm-25mm

(For narrow beam option: add 50mm to the height)

Accessories

To order, use the following suffix



Honeycomb louvre

- /HL Honeycomb louvre
- /CG Clear glass
- /RG Ribbed Spreading Glass

PRODUCT CODE

Please refer to following page for product exceptions

Lumen Output:

_____	(05)	500 lm
_____	(07)	700 lm
_____	(10)	1000 lm
_____	(13)	1300 lm
_____	(20)	2000 lm

Colour Temps:

_____	(27)	2700K
_____	(30)	3000K
_____	(35)	3500K
_____	(40)	4000K

Colour Rendering:



_____	(V8)	Vibrancy 80
_____	(V9)	Vibrancy 98
_____	(80)	CRI 80+
_____	(98)	CRI 98
_____	(B9)	Beauty

Beam Angles:

_____	(N)	Narrow: 20°
_____	(M)	Medium: 40°
_____	(W)	Wide: 60°

Colour:

_____	(W)	White
_____	(G)	Grey
_____	(B)	Black

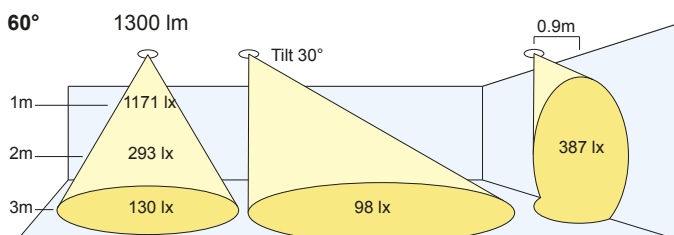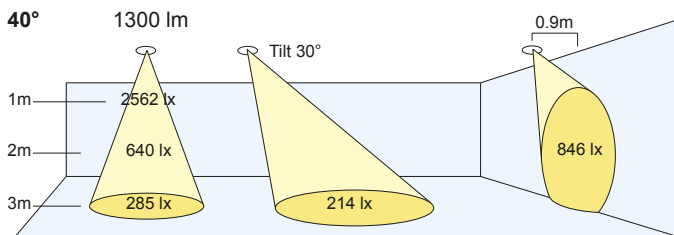

MA _____ / ** / **

Options:

/DT Trailing Edge	/M3 3Hrs Maintained
/DL Leading Edge	/ST Self Test
/DD DALI	/DE DALI Emergency
/DA Analogue (1-10V)	
/LT Lumentalk	

For full list of options see page 2.

Availability

LED Modules
 CRI80 / Vibrancy 80: Standard delivery.
 CRI98 / Vibrancy 98 / Beauty: Extended delivery times may apply, please contact sales.
 Future Xicato LED modules: Available via special order. Extended delivery times may apply, please contact sales.

Colour
 White: Standard delivery.
 Grey: Extended delivery times may apply, please contact sales.
 Black: Extended delivery times may apply, please contact sales.

Product Options

90 SERIES MICRO WASHER 90

Beam Angle	CRI 80				CRI 98				VIB 80				VIB 98				BEAUTY								
	500lm	700lm	1000lm	1300lm	2000lm	500lm	700lm	1000lm	1300lm	2000lm	500lm	700lm	1000lm	1300lm	2000lm	500lm	700lm	1000lm	1300lm	2000lm	500lm	700lm	1000lm	1300lm	2000lm
Beam Angle																									
Spot: 10°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Narrow: 20°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Medium: 40°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wide: 60°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Colour Temps																									
2200°K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2700°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓
3000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
3500°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Body Colour																									
White	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Satin Nickel	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Grey	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dimming Options																									
Standard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DT Trailing Edge	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓
/DL Leading Edge	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓	●	✓	✓	✓	✓	-	✓	✓	✓	✓
/DD DALI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DA Analogue (1-10V)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DS DSI	-	-	●	✓	✓	-	-	✓	✓	-	-	-	●	✓	✓	-	-	✓	✓	-	-	-	✓	✓	-
/SD Switch Dim	-	-	●	✓	✓	-	-	✓	✓	-	-	-	●	✓	✓	-	-	✓	✓	-	-	-	✓	✓	-
/DX DMX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/AP Analogue Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DP DALI Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/UV Universal Voltage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RD Rotary Dimming	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Emergency Options																									
/M3 3Hrs Maintained	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/ST Self Test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DE DALI Emergency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Accessories																									
/P Custom Colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/AB Astral Bezel	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/AW White Front Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BD Barn Doors	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BF Baffle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/CG Clear Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/CG w/c Clear Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/GR Glass Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/HL Honeycomb Louvre	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/HL w/c Honeycomb Louvre (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG Ribbed Spreading Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RG w/c Ribbed Spreading Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SL Softening Lens	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/S w/c Softening Lens (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SN Snoot	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/WB White Inner Body With Gyro Rings	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Regional Driver Spec																									
/BIS	Regional driver spec for India, beam angles will vary. Please contact sales team for more information.																								

Key

- ✓ Option Available
- Only available with spot/narrow optics
- Only available with medium/wide optics
- Option not available