


120 SERIES


NIMBLE WASHER

- **lumen talk**
- Fixed downlight with minimal glare
- Various reflector and lumen options
- Supplied with pre-wired non dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for halogen and metal halide
- Supplied with extended glare reduction baffle

700/1000/1300lm CRI 80+ 2000lm CRI 80+ 3000lm CRI 80+ 4000lm CRI 80+ 5000lm CRI 80+
 700/1000/1300lm CRI 98 2000lm CRI 98



Bezel Size 132mm Cut Out: Ø122mm
 Ceiling Thickness: 1 - 28mm
 (For spot beam option: add 50mm to the height)



PRODUCT CODE

Please refer to following page for product exceptions

Lumen Output:

(05)	500 lm
(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm
(40)	4000 lm
(50)	5000 lm

Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

Colour Rendering:




(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98
(B9)	Beauty

Beam Angles:


(S)	Spot: 10°
(N)	Narrow: 20°
(M)	Medium: 40°
(W)	Wide: 60°

Colour:

(W)	White
(N)	Nickel Satin
(B)	Black

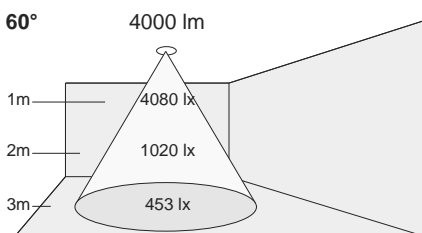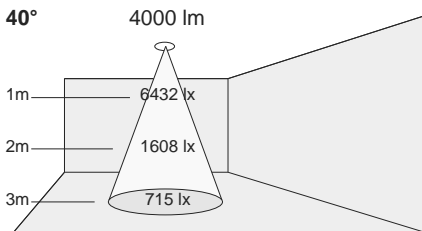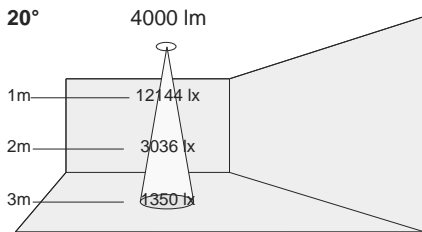

N3

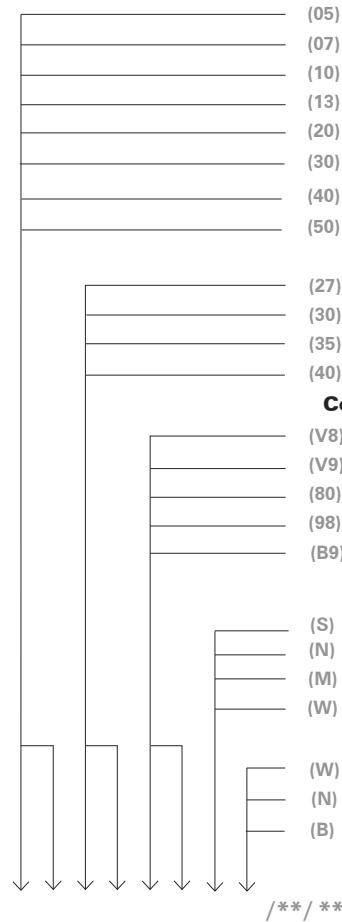

- Options:**
- Dimming:**
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
 - /M3 3Hrs Maintained
 - /ST Self Test
 - /DE DALI Emergency

For full list of options see page 2.

