


**100 SERIES**

**UNIVERSAL AQUA**

- lumentalk
- Sealed recessed downlight with deep set reflector
- IP54 to ceiling for wet room applications
- Die-cast construction
- Glare control secondary reflector
- Supplied with pre-wired remote non-dimming driver

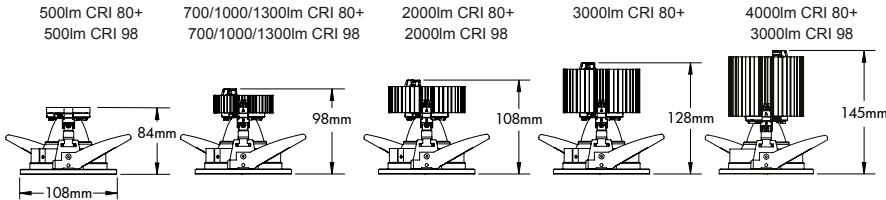

Bezel Size 108mm Cut Out: Ø95mm  
 Ceiling Thickness: 1 - 25mm  
 (For narrow beam option: add 30mm to the height)

**PRODUCT CODE**

Please refer to following page for product exceptions

**Lumen Output:**

_____	(05)	500 Im
_____	(07)	700 Im
_____	(10)	1000 Im
_____	(13)	1300 Im
_____	(20)	2000 Im
_____	(30)	3000 Im
_____	(40)	4000 Im

**Colour Temps:**

_____	(27)	2700K
_____	(30)	3000K
_____	(35)	3500K
_____	(40)	4000K

**Colour Rendering:**

_____	(V8)	Vibrancy 80
_____	(V9)	Vibrancy 98
_____	(80)	CRI 80+
_____	(98)	CRI 98
_____	(B9)	Beauty

**Beam Angles:**



_____	(N)	Narrow: 20°
_____	(M)	Medium: 40°
_____	(W)	Wide: 60°

**Colour:**

_____	(W)	White
_____	(N)	Nickel Satin
_____	(B)	Black

**AQ** \_\_\_\_\_ /\*\*/ \*\*

- Options:**
- Dimming:**
  - /DT** Trailing Edge
  - /DL** Leading Edge
  - /DD** DALI
  - /DA** Analogue (1-10V)
  - /LT** Lumentalk
  - /M3** 3Hrs Maintained
  - /ST** Self Test
  - /DE** DALI Emergency

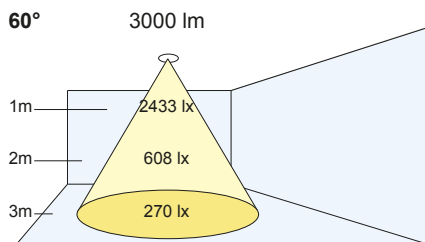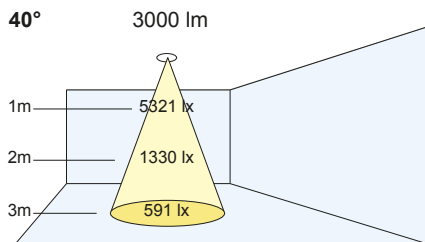

## Availability

**LED Modules**  
 CRI80 / Vibrancy 80: Standard delivery.  
 CRI98 / Vibrancy 98 / Beauty: Extended delivery times may apply, please contact sales.  
 Future Xicato LED modules: Available via special order. Extended delivery times may apply, please contact sales.

**Colour**  
 White: Standard delivery.  
 Nickel Satin: Standard delivery.  
 Black: Standard delivery.

# Product Options

## 100 SERIES UNIVERSAL AQUA

	CRI 80						CRI 98						VIB 80						VIB 98						BEAUTY					
Beam Angle	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm	500lm	700lm	1000lm	1300lm	2000lm	3000lm
<b>Spot: 10°</b>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Narrow: 20°</b>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Medium: 40°</b>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Wide: 60°</b>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Colour Temps</b>																														
2200°K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2700°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓
3000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
3500°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Body Colour</b>																														
White	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Satin Nickel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Grey	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Dimming Options</b>																														
Standard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DT Trailing Edge	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/DL Leading Edge	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓
/DD DALI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DA Analogue (1-10V)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DS DSI	-	-	●	●	✓	✓	-	-	○	-	✓	✓	-	-	●	●	✓	✓	-	-	○	-	✓	✓	-	-	○	-	✓	✓
/SD Switch Dim	-	-	●	●	✓	✓	-	-	○	-	✓	✓	-	-	●	●	✓	✓	-	-	○	-	✓	✓	-	-	○	-	✓	✓
/DX DMX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/AP Analogue Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DP DALI Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/UV Universal Voltage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/RD Rotary Dimming	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Emergency Options</b>																														
/M3 3Hrs Maintained	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/ST Self Test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/DE DALI Emergency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>Accessories</b>																														
/P Custom Colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
/AB Astral Bezel	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/AW White Front Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BD Barn Doors	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/BF Baffle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/CG Clear Glass	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/CG w/c Clear Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/GR Glass Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/HL Honeycomb Louvre	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/HL w/c Honeycomb Louvre (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG Ribbed Spreading Glass	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/RG w/c Ribbed Spreading Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SL Softening Lens	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/S w/c Softening Lens (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/SN Snoot	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
/WB White Inner Body With Gyro Rings	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Regional Driver Spec</b>																														
/BIS	Regional driver spec for India, beam angles will vary. Please contact sales team for more information.																													

## Key

- ✓ Option Available
- Only available with spot/narrow optics
- Only available with medium/wide optics
- Option not available