


200 SERIES XIRIUS SOFT

- lumen talk
- Low height, high output downlight
- Diffuser and faceted reflector for reduced glare
- Larger version available (Ø260mm)
- IP44 under canopy glass option
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for CFL



/X2


700/1000/1300/2000/3000/4000/5000lm CRI 80+
700/1000/1300/2000/3000/4000lm CRI 98



Bezel Size: 208mm Cut Out: Ø198mm
Ceiling Thickness: 1 - 22mm

/X3

700/1000/1300/2000/3000/4000/5000lm CRI 80+
700/1000/1300/2000/3000/4000lm CRI 98




Bezel Size: 260mm Cut Out: Ø235mm
Ceiling Thickness: 1 - 22mm

Accessories

To order, use the following suffix



/AB Astral Bezel option



Factory fitted accessory that extends the bezel to a cutout range of 210mm to 240mm.



- /CG Clear Glass
- /GR Decorative glass ring
- /HL Honeycomb louvre
- /SL Softening Lens

PRODUCT CODE

Please refer to following page for product exceptions

Lumen Output:

(05)	500 lm
(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm
(40)	4000 lm
(50)	5000 lm

Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

Colour Rendering:


(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98
(B9)	Beauty

Beam Angles:


(W)	Wide
-----	------

Colour:

(W)	White
-----	-------

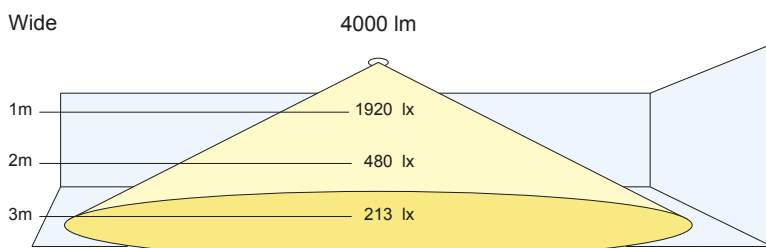

X2

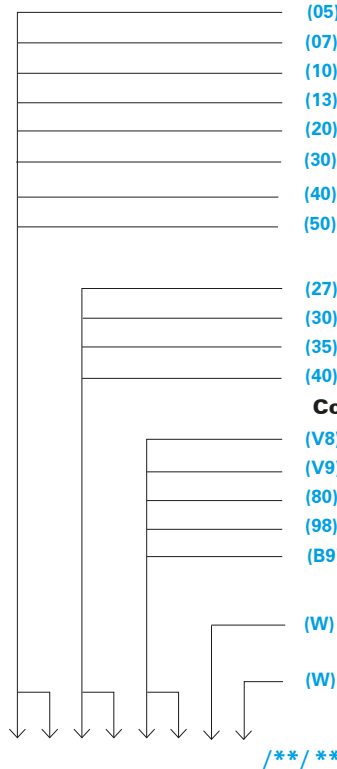

Options:

- Dimming:**
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

For full list of options see page 2.

Availability

LED Modules
 CRI80 / Vibrancy 80: Standard delivery.
 CRI98 / Vibrancy 98 / Beauty: Extended delivery times may apply, please contact sales.
 Future Xicato LED modules: Available via special order. Extended delivery times may apply, please contact sales.

Colour
 White: Standard delivery.

Product Options

200 SERIES XIRIUS SOFT

	CRI 80						CRI 98						VIB 80						VIB 98						BEAUTY					
Beam Angle	70°lm	100°lm	130°lm	200°lm	300°lm	400°lm	70°lm	100°lm	130°lm	200°lm	300°lm	400°lm	70°lm	100°lm	130°lm	200°lm	300°lm	400°lm	70°lm	100°lm	130°lm	200°lm	300°lm	400°lm	70°lm	100°lm	130°lm	200°lm		
Spot: 10°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Narrow: 20°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Medium: 40°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Wide: 70°	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Colour Temps																														
2200°K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
2700°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓		
3000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-		
3500°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
4000°K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Body Colour																														
White	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Black	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Satin Nickel	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Grey	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Dimming Options																														
Standard	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/DT Trailing Edge	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-	-	-		
/DL Leading Edge	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-	-	-		
/DD DALI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/DA Analogue (1-10V)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/DS DSI	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/SD Switch Dim	-	-	✓	-	-	-	-	✓	✓	-	✓	-	-	-	✓	-	-	-	-	✓	✓	-	✓	-	-	✓	✓	-		
/DX DMX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/AP Analogue Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/DP DALI Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/UV Universal Voltage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓		
/RD Rotary Dimming	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Emergency Options																														
/M3 3Hrs Maintained	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/ST Self Test	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/DE DALI Emergency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Accessories																														
/P Custom Colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/AB Astral Bezel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/AW White Front Ring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/BD Barn Doors	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/BF Baffle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/CG Clear Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/CG w/c Clear Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/GR Glass Ring	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/HL Honeycomb Louvre	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/HL w/c Honeycomb Louvre (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/RG Ribbed Spreading Glass	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/RG w/c Ribbed Spreading Glass (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/SL Softening Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
/S w/c Softening Lens (With Clip)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/SN Snoot	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
/WB White Inner Body With Gyro Rings	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Regional Driver Spec																														
/BIS	Regional driver spec for India, beam angles will vary. Please contact sales team for more information.																													

Key

- ✓ Option Available
- Only available with spot/narrow optics
- Only available with medium/wide optics
- Option not available